

100W Vehicle Charger

C100
Vehicle Charger



SAFETY APPROVALS CE, FCC

FEATURES

12-24V DC Input
3 Years Warranty

INPUT CHARACTERISTICS

Rated Input Voltage 12-24V DC
Rated Input Current 12A Max input Current

OUTPUT CHARACTERISTICS

Power 100W MAX
D40-190005263 19V5.263A

SAFETY STANDARDS

EMC EN50498:2010
FCC 47 CFR Part 15 Subpart B:
2019, ANSI C63.4-2014

ENVIRONMENTAL

Operation Temperature -10 °C – 40 °C
Storage Temperature -25 °C – 70 °C
Operation Humidity 5%(0°C) ~ 90%(40°C)
Storage Humidity 5%~ 95%

PROTECTION

Over Voltage Protection Auto Recovery
Short Circuit Protection Auto Recovery
Over Current Protection Auto Recovery


MECHANICALS

Cable
UL20276#18AWG, 1750mm±30

Case Material
UL94-V1

Case Dimension

Weight

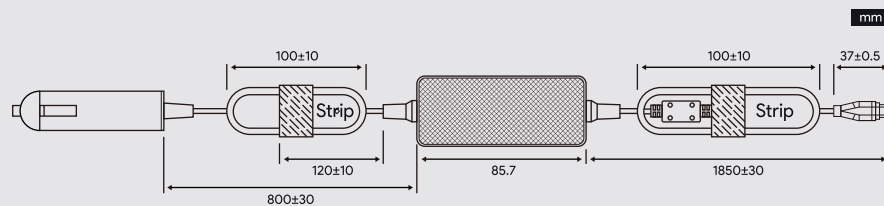

L85.7*W36.4*H26mm

240g (Ref.)